


“Wilma RGB” 12 V LED Circuit Board


Wilma RGB is a flexible RGB circuit board for 12 V operating.

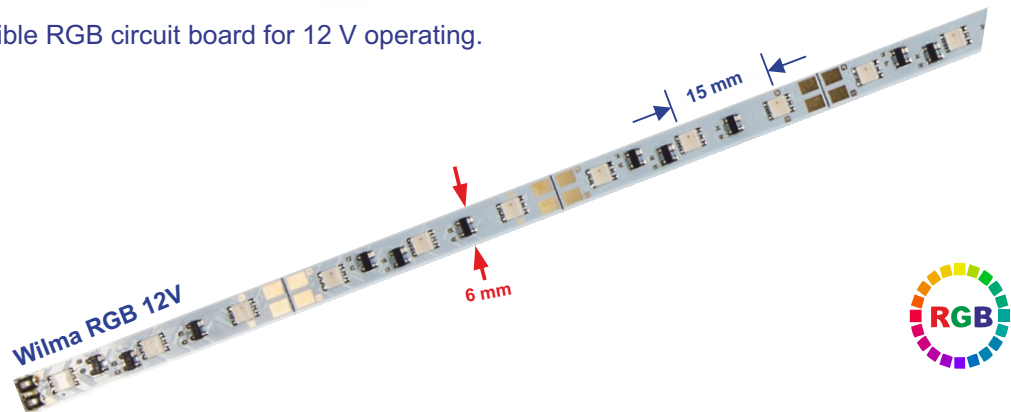

The 6 mm wide circuit boards is flexible, i.e. it is highly bendable and can be twisted to some degree.

The LEDs are spaced at 15 mm intervals. The total length of the strip is 270 mm.

The shortest possible length is 45 mm.

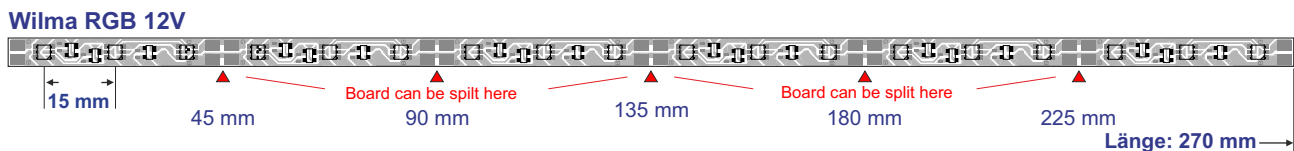

Order number

Type	Wilma RGB 12V
Art. no.	5 7000 200

Technical specifications

Type	Dimensions	LED spacing	No. of LEDs	Splittable every	Power rating		Max. connectable length per power supply
					per board	per metre	
Wilma RGB 12V	270 x 6 mm	15 mm	18	45 mm	4.3 W	16.1 W	2.70 m

Photometric data

Colour temp.	red	green	blue	white
Wilma RGB 12V	212 lm/m	279 lm/m	77 lm/m	568 lm/m

