

## DALI Interface

### General data:

Degree of protection	IP20
Class of protection	II
Conformity	CE
Operating temperature	-20 °C to +40 °C
Output 0–10 V	Max. 50 converters can be controlled
Dimming curve	Logarithmic
Article number	1 0338 300

### Electrical data:



Input voltage	90–264 V, 50/60 Hz
Control current 0–10 V	Max. 60 mA / max. 50 converters
Input power	1.6 W
DALI bus current demand	2 mA
Control input	DALI / IEC 62386 Part 206
Galvanic isolation	Yes
Short-circuit protection	Yes
EMC conformity	EN 55015, EN 61000-3-2 Class C
EMC protection	EN 61547 (2 kV surge protection)

### Mechanical data:

Weight	100 g
Housing material	Rigid PVC
Fire protection	UL 8750
Dimensions (L x W x H)	150 x 40 x 30 mm
Housing colour	White

All values refer to an ambient temperature of +25 °C.

Dimming curve

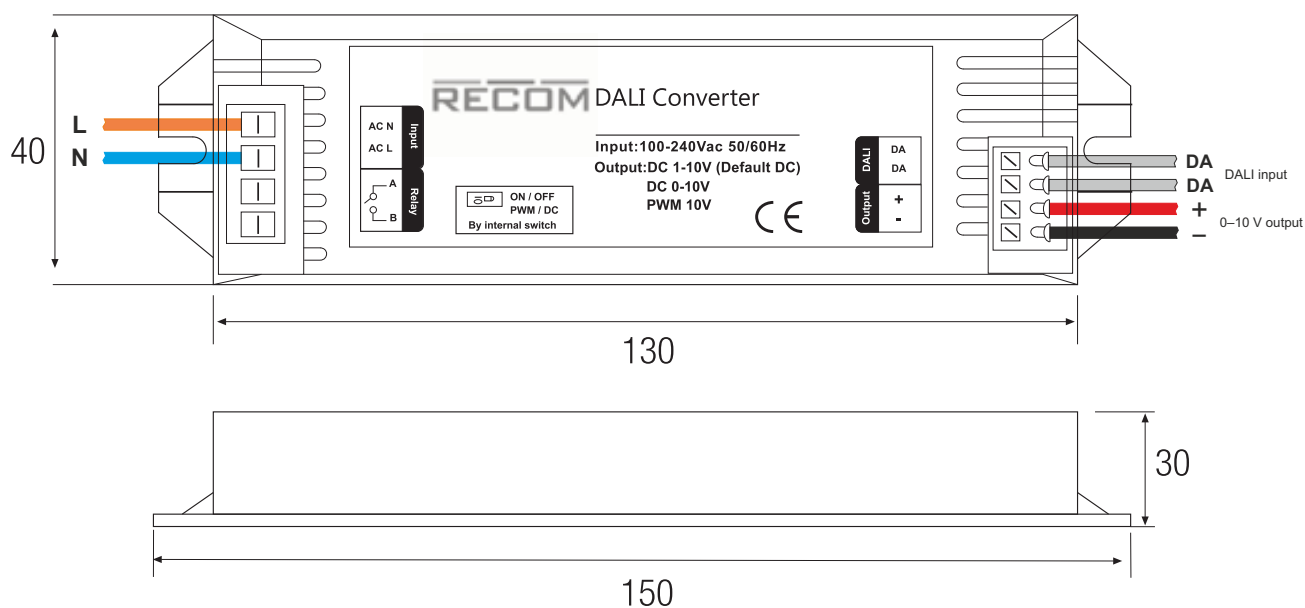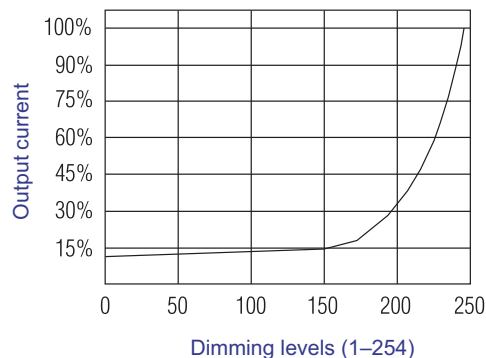

DALI Interface

