



Connection Diagram

Dimmable Facade Profile

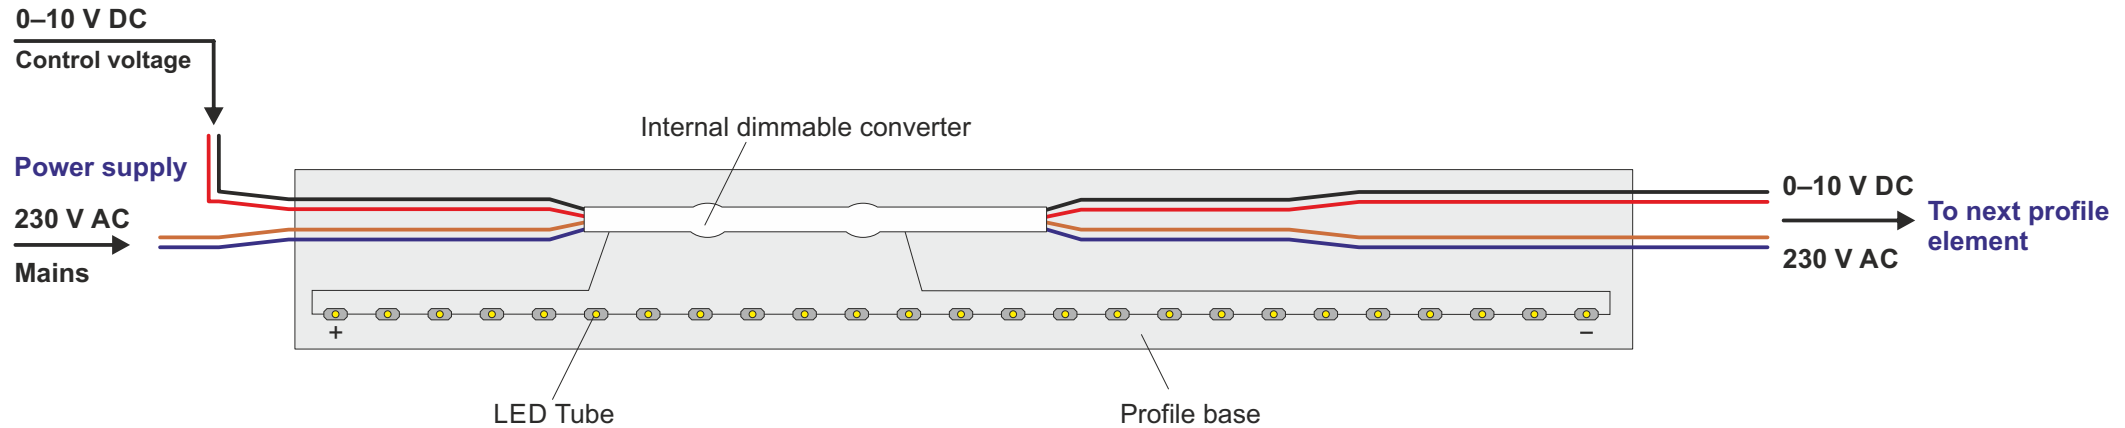

Control and 0–10 V control voltage generating devices

Manual dimmers

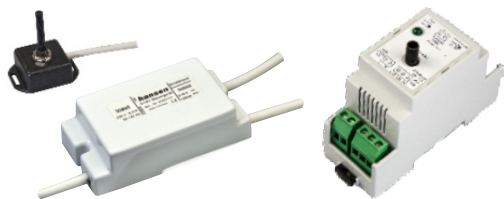

Radio remote control



Light-dependent controllers



Interface for existing control systems



Note:

Shown is a selection of possible control devices that can be used for dimming. Adaptation to existing control systems (e.g. DALI) is possible with an interface.

Note:

Maximum connectable length per power supply point: 150 m
Power consumption per metre: 0.04 A

Note:

LEDs are connected in series