

Luminous Panel (RGBW)

The **hansen Luminous Panel** is a very flat light source with a large luminous area. It can be used to backlight acrylic glass panes, banner fabric, posters or similar material.

The **Luminous Panel** consists of a 8 mm thick light-transmitting acrylic glass pane illuminated by LEDs shining into the material from one or two sides. A 3 mm white acrylic glass rear panel attached to the light-transmitting pane reflects the light towards the front.


There is no pre-determined height or width, the **Luminous Panel** is made to customer specification.

General data:

Type of connection	Parallel connection
Operating voltage	12 V
Power consumption	21.3 W/m (one illuminated side)
Light colours	coloured: Red / green / blue white: 2700K / 3000K / 4000K / 5000K / 6500K
LED spacing	2 x 15 mm
Circuit board pitch	45 mm
Degree of protection	IP20
Class of protection	III
Ambient temperature range	-25 °C to +65 °C
Residual luminous flux	70% after 50.000 operating hours
Conformity	CE, RoHS
Minimum dimensions	80 x 80 mm
Maximum width	3,000 mm
Max. height (between LED strips)	1,500 mm
Overall depth (thickness)	13 mm (+/- 1.5 mm)
Weight	15.4 kg/m ²



Material properties – PMMA (acrylic):

Manufacturing process	Casting
Linear expansion	0.07 mm/(m K) (DIN 53752-A)
Reaction to fire	Building material class B2 (DIN 4102)
Flammability	HB (UL 94)

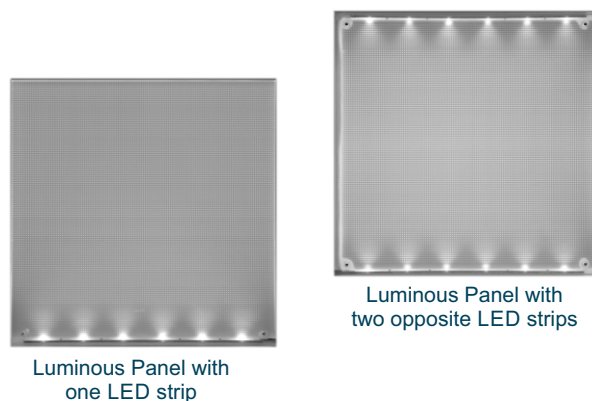


Luminous Panel with one LED strip

Luminous Panel with two opposite LED strips

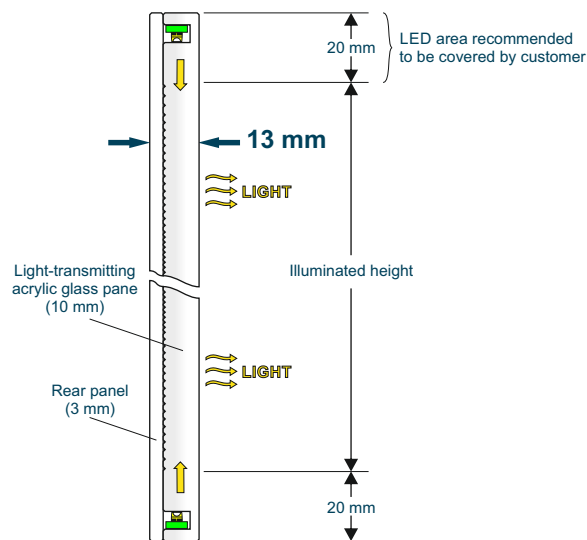

Wiring diagram:

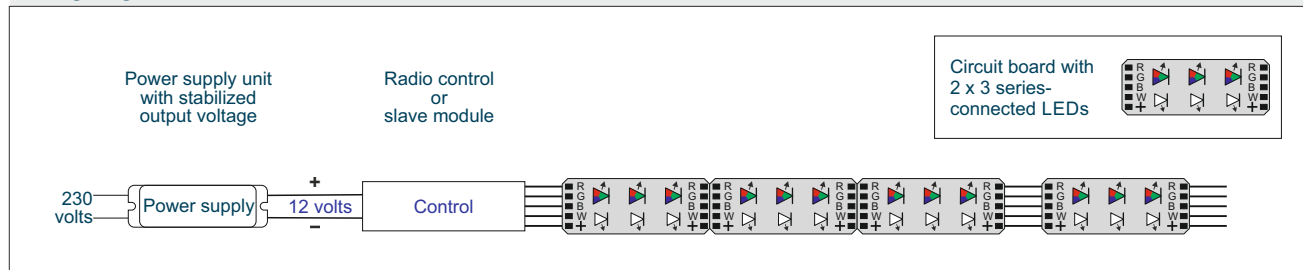

All values refer to an ambient temperature of +25 °C.



Technical modifications reserved. Content is protected by copyright.

February 2021 LD5RGBW/02/2021